

W8 — Sewer Network Design

How the design is made, and what it gives for the test area

Internal working document — design team

20 August 2026

Item	Value
Test area	551 hectares
Sewer designed	1,415 chambers / 71.6 km
Properties served	4,226 on 3,017 plots
Flow at the outfall	3,620 m3/day average, 96 L/s peak
Pumping stations	0 — the whole area runs on gravity
Deepest chamber	10.45 m (limit 12.00 m)
Main pipe	6.15 km, taken from your drawing
Joins onto it	20 of 55 possible
Checks failing	3 of 22

Contents

Summary	3
1. How the design is made	4
2. Cleaning the roads	4
3. How much sewage, and from where	4
4. House connections	5
5. What the design gives	5
6. The checks	7
7. What is assumed, and what is measured	8
8. Checked against the network already in the ground	8
9. What comes next	9

Summary

This run designs a full sewer for the 551 hectare test area: 1,415 chambers, 71.6 km of pipe, and a level for every pipe end. It serves 4,226 properties on 3,017 plots. At the outfall the flow is 3,620 cubic metres a day on average and 96 litres a second at the busiest hour. The whole run takes about 20 seconds, so any rule can be changed and the effect seen the same day.

Six things changed since the last run, all from your review and from measuring this design against the network NAMA actually built.

- **The main pipe is now yours, not mine.** Earlier I tried to FIND a main pipe by picking streets near a line you described. It found 2.1 km in the southern corner, covering an eighth of the area, so almost the whole town reached it at one point. The trunk is now read straight from your drawing: 6.15 km serving this area, of which 3.87 km lies inside the boundary. Both legs drain to where they meet, and that meeting point sits about 792 m outside the boundary, so the pipe is followed a little way past the edge to reach it.
- **The whole area now runs on gravity.** With the main pipe where it really is, nothing has to be pumped. The last run needed four pumping stations; this one needs none, and the deepest chamber falls from 11.88 m to 10.45 m against a 12 m limit. That result belongs to the alignment you drew, not to anything clever in the code.
- **Joins onto the main pipe are kept to the fewest that work.** Each one becomes a chamber that will be deep once the whole town drains through it, so the route search is charged for using one. 55 places could take a connection; 20 are used. That number was found by trying: at 30 joins the area still runs on gravity, at 28 the first pumping station appears, and cutting below that buys nothing more.
- **Crossing a dual carriageway is now a last resort.** A crossing needs trenchless work, so it is charged heavily — except at the underpass you gave us, which costs nothing. Of 26 crossings offered, the design uses ONE, and it goes through that underpass. No trenchless work is needed anywhere.
- **Fewer, longer runs.** The design was growing a separate branch down every little street, which gave far more dead ends than the built network has. 0 short dead-end branches (0 km) are now dropped and those houses simply join the sewer in the street they came off. Continuous runs fall from 1,162 to 543 and the typical run more than doubles, from 48 m to 105 m — fewer, longer trenches to dig.
- **Fewer chambers, steadier gradients.** Junction chambers are no longer added just to satisfy the inlet-angle rule — that was putting in roughly 200 chambers that buy nothing on site. Anything sharper than 85 degrees is now flagged for a designer to look at instead, and listed in its own layer for the chamber schedule. And down a single street the pipe is laid at ONE gradient rather than a new one at every chamber, which is what a contractor wants to set out.

What still needs attention: 3 checks fail, and none of them touches pipe sizes, gradients or levels.

- **75 pipes arrive at a chamber at a sharp angle.** Each needs a purpose-made chamber with a curved channel — ordinary detail work, and they are marked in the outputs.
- **237 plots have no sewer within 50 m.** Their only frontage is a dual carriageway, where no pipe may be laid. They need either a sewer in the service road alongside or a local collector — your call, because it means relaxing the dual-carriageway rule in a limited way.
- **275 branch sewer starts too close to a junction chamber** and should be merged into it on the drawing.

House connections, riders and stub-outs are NOT drawn in this iteration. You were not satisfied with them and asked to park them until the survey gives real frontages. The check that a house sitting below road level can still drain into the sewer is untouched and still runs — it deepened 64 chambers, and 0 plots are left unresolved.

1. How the design is made

The work runs in steps, each one a separate piece of code, so any rule can be found and changed in one place.

Step	What it does
Read the inputs	roads, plots, ground levels, flood map, electricity accounts
Clean the roads	remove what cannot carry a sewer, join broken streets back together
Build the tree	one path from every street to the outfall, no loops
Place chambers	at junctions, at bends, and at regular spacing
Count the load	properties per plot, added up down the network
Size and set levels	pipe size and gradient chosen together, deep spots become pumping stations
Connect the houses	each plot to the pipe it faces, and check it can drain
Check everything	21 rules re-checked independently of the design code
Write the outputs	GIS files, CAD drawing, SewerGEMS package, maps

2. Cleaning the roads

A road file describes how cars move. A sewer follows the street but joins at a point, so the file has to be cleaned first, or the design puts a chamber wherever the survey happened to break the line.

What was removed or changed	Amount
Dual carriageways — no pipe at all, trunk included	101 lines
Roundabouts — they collect no sewage	12
Rings kept because plots sit inside them (blocks, not roundabouts)	69
Turning links and slip roads	82
Straight streets joined back into one line	103
Dead ends serving nobody	0
Road length before / after	97.4 km / 83.6 km

Everything removed is written to the corridor file with the reason beside it, so each one can be looked at and put back if the rule got it wrong. Telling a roundabout from a small block cannot be done on shape alone — a square scores higher on roundness than a real roundabout. The test used here is whether any plot sits inside the ring: a roundabout circles road, a block circles houses.

3. How much sewage, and from where

Each electricity account is one property. A plot with three accounts holds three properties. In the test area 3,885 accounts sit on 1,322 plots, giving 4,226 properties in total.


Item	Value	Where it comes from
People per property	5	your decision, 19 August
Sewage per person	171.3 litres a day	guideline G201 p70-71
Properties per plot	1.4 average	counted from electricity accounts
Plots loaded	3,017	built 2,217, planned 522, unparceled 248
Farm plots with houses	30	farming sends nothing, but houses on a farm do
Extra water leaking in	720 litres a day per km of sewer	guideline G201 p72-73

4. House connections

The connection is schematic — the sizes are not designed. The one thing that must be right is whether the house can drain into the sewer at all, because roads are sometimes raised above the plots beside them.

Rule	Result here
Each plot joins the pipe it faces, by a short line from the plot edge	0 connections
Up to 3 neighbours share one rider	0 riders
Empty plots get a capped stub-out for later	0 stub-outs
Houses that could not drain at first	160
Chambers deepened to let them drain	64
Still cannot drain — need a local answer	0


These are kept in three separate files (connections, riders, stub-outs) so that SewerGEMS never reads them as sewers and the CAD drawing can switch them off.

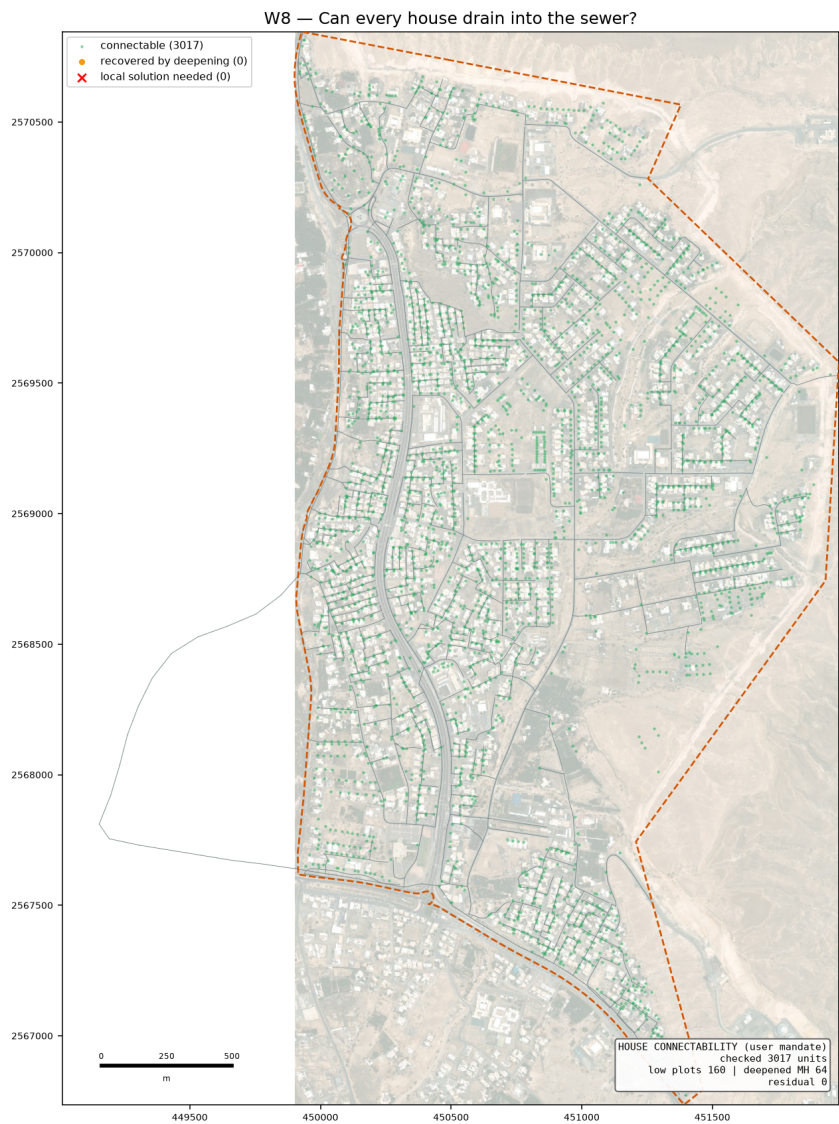


Green can drain as designed, amber needed a deeper chamber, red still cannot.

5. What the design gives

Item	Value
Chambers / pipes	1,415 / 1,414
Sewer length	71.6 km
Pipe sizes used	DN200 65.234 km · DN250 1.49 km · DN315 0.875 km · DN400 1.526 km · DN500 2.517 km
Flow at the outfall	3,620 m3/day average, 96 L/s peak
Outfall position	(449153, 2567811), ground 352.3 m — where the two legs of your main pipe meet, then on to the existing Ibri STP
Main pipe	6.15 km from your drawing (3.87 km inside the boundary), 65 chambers on it
Joins onto the main pipe	20 used of 55 possible
Dual carriageway crossings	1 — through the underpass, so no trenchless work
Deepest chamber	10.45 m against a 12.00 m limit
Drop structures	177 (78 need the tall type)
Pumping stations	none — the whole area runs on gravity
Streets laid at one steady gradient	194 of 358 runs
Corner chambers sitting under 2 m from a plot	0 — flagged for the drawing
Checks failing	3 of 22

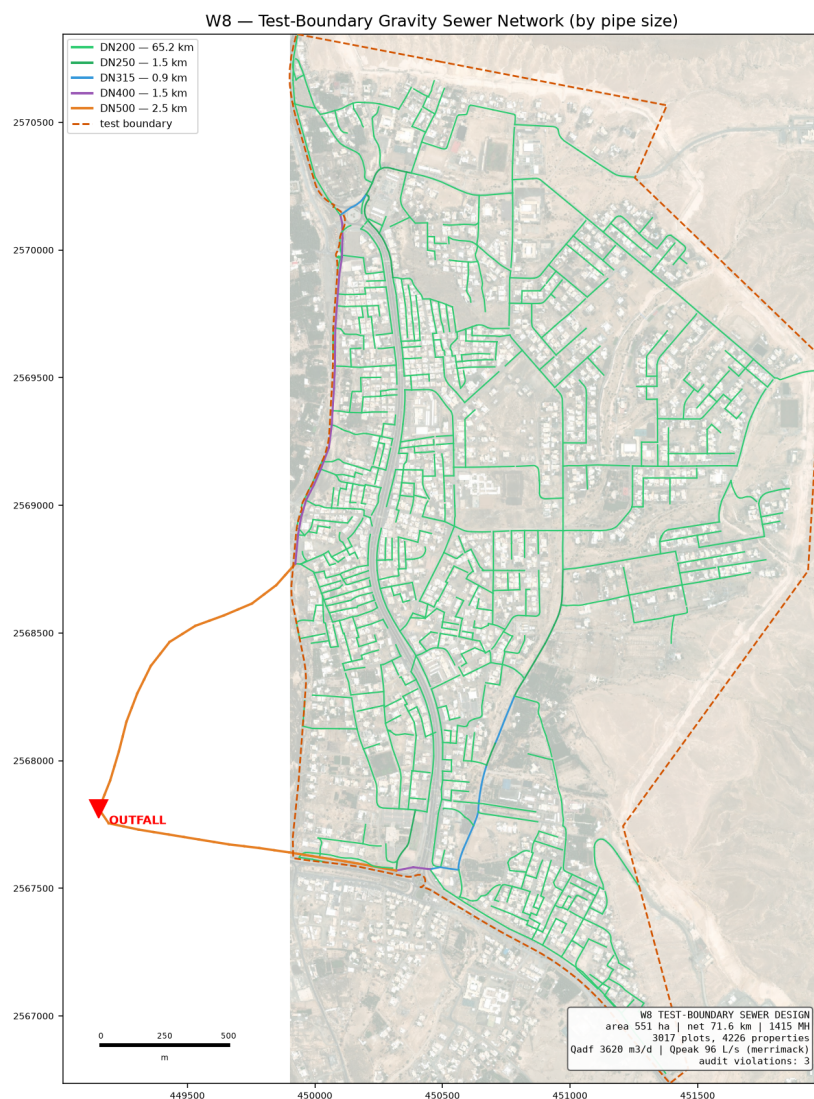

The designed sewer, coloured by pipe size.

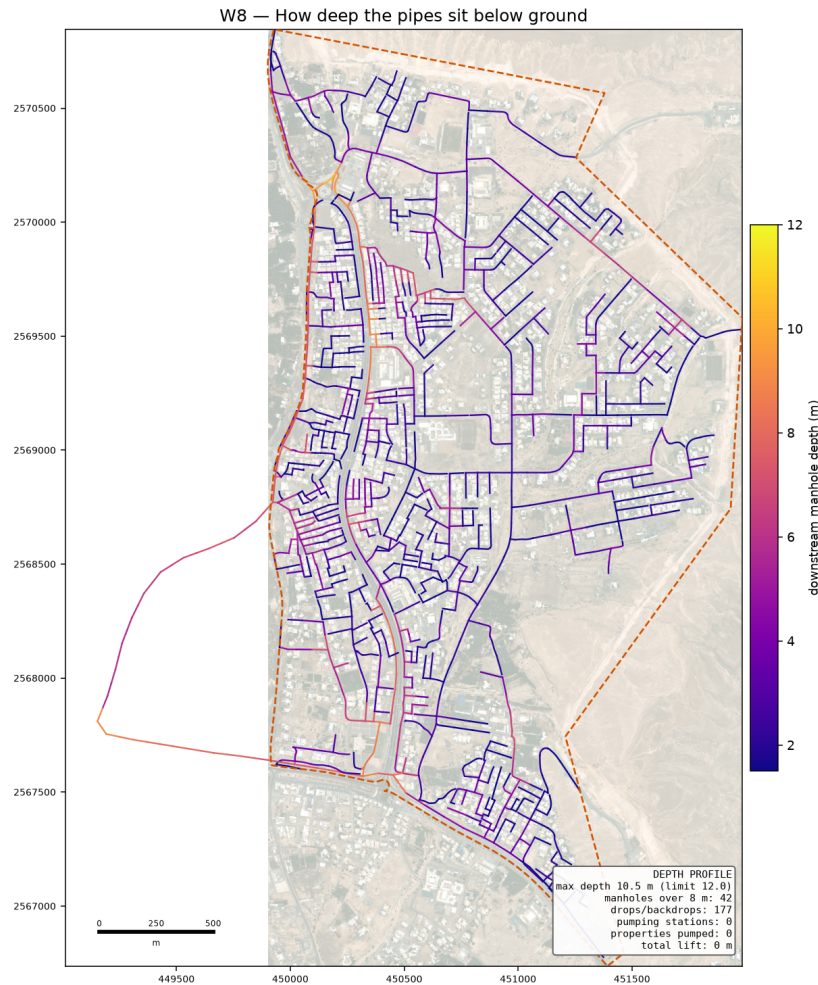

How deep the pipes sit. Dark means deep digging.

A sewer only flows because it falls. Over a long route the pipe must keep falling even where the ground does not, so it sinks further below the surface the further it travels. The guideline stops that at 12 metres: past that, digging and shoring cost more than a pump, and a pumping station has to go in.

On the previous run four stations were needed. On this one none are, and the deepest chamber is 10.45 m. The difference is not a cleverer program — it is the main pipe being where it really is. The trunk I had guessed at covered only an eighth of the area's length and sat in the southern corner, so sewage from the north had to travel the whole way to reach it and went deep doing so. Your alignment runs down the western side and in from the east, so each part of town reaches it close to home.

This matters for the report as much as for the design: when we were asked whether the trunk alignment was causing the pumping, the honest answer at the time was measured and said no. That measurement was made against a guessed alignment, and it was wrong.

6. The checks

The design is checked by separate code that re-works every rule from the finished drawing, so the design cannot mark its own homework. Each check names the guideline page it comes from.

ID	Check	Guideline	What was found
C4	Inlet angle	G203-p30 (deviation: 75 deg)	75 of 1414 inlets under 85 deg (project value; guideline is 90 - see c
C8	Branch start offset	user rule / SWNETWROK 10 m	275/276 branch heads clear

ID	Check	Guideline	What was found
D1	Property connection length	G203-p18 Tab 4 (A9)	237/3017 connections over 50.0 m; longest 356 m

On self-cleaning: 1,299 of 1,414 pipes cannot reach the 0.75 m/s flow speed even at their busiest hour. That is normal on small house streets, and the guideline allows a second method for exactly this case — a minimum gradient worked out from the drag on the pipe wall. All of them meet that instead. It rests on a value the guideline never gives (1 Pascal is assumed); if NWS sets it at 2, 915 pipes would need steeper gradients. That single number is the best reason to settle it at the kickoff meeting.

7. What is assumed, and what is measured

Assumed	Why
Drag value of 1 Pascal	the guideline gives no number; it decides the gradient on small pipes
5 people per property	your decision, 19 August
Plastic pipe wall thickness	pipe sizes are quoted outside; the inside bore is worked out from a standard wall class
Floor areas, staff and pupil numbers	nobody supplies them, so they are worked out from plot size and building cover — replace when the land use data arrives
Where a rider joins	the guideline does not say; the nearest chamber is used

Measured	Source
Properties per plot	electricity accounts
Ground levels	0.5 m ground model
Which roads cannot be dug	the road file's own column
Flood-prone ground	50-year hazard map, classes 4 to 6

8. Checked against the network already in the ground

You asked for this design to be measured against what NAMA actually built rather than taken on trust. Their network was read from the KMZ files: 188.6 km of gravity sewer, 30.8 km of rising main, and both STP points. Their own file warns that the data is for reference only — pipe sizes and depths are largely blank — so the comparison rests on the levels, which are filled in, and on the shape of the network.

Measure	Built by NAMA	This design
Gradient, typical	4.98 mm/m	5.00 mm/m
Cover depth, typical	1.92 m	1.75 m
Cover depth, 9 in 10 below	4.58 m	5.02 m
Junctions per km	3.9	3.6
Dead-end branch heads per km	4.2	3.9
Typical continuous run	65 m	105 m
Pipes running along a dual carriageway	0.1%	5 of 1,423

The gradients and depths sit almost on top of theirs, which is the check that mattered — the hydraulics behave the way a real designer's did. On layout this design is now the tidier of the two: fewer junctions and fewer dead ends per kilometre, and runs that are longer to dig.

Two things were learned that changed what we do. Their manholes sit about 30 m apart against our 43 m, and the obvious reading is that tighter spacing keeps the trench shallow. It was tested at five spacings and it

is simply not true: from 100 m down to 30 m the chamber count nearly doubles and the depth does not improve at all. So we do not copy it. And their network almost never runs along a dual carriageway, which confirms the rule you gave and told us that the chambers we still had sitting on one were a real fault, not a detail.

One difference is worth keeping in mind when comparing depths: their network is shallower partly because it pumps — 30.8 km of rising main against 188.6 km of gravity. This design pumps nothing, because the main pipe alignment you drew gives every part of town a short route.

9. What comes next

- **Your trunk line.** The main pipe is yours to fix. The design then grows the side networks into it — the code takes connection points as a setting, so this is a change of input, not a change of method.
- **The SewerGEMS check.** The import package is ready with a comparison sheet. Once the model runs, every pipe's flow and speed can be set beside ours; anything more than 5 per cent apart gets looked at before the design is called proven.
- **Junction angles.** 75 pipes still arrive at a chamber too sharply. This is a layout job at junctions and is the main open item in the design itself.
- **The land use data from your colleague.** Missing plots and properties per plot will replace the derived figures without touching the design code.